

# UE SHORT FORM CATALOG

**LEADERS IN SAFETY, ALARM & SHUTDOWN**

Electronic and Electromechanical Switches for Pressure,  
Differential Pressure, and Temperature

Pressure Transmitters and Transducers

Industrial Temperature Sensors





is a privately held corporation headquartered in Watertown, Massachusetts, USA. We are an international manufacturer of durable and reliable pressure and temperature switches, controls and sensors. Focused on providing protection to equipment, processes and personnel in a variety of industrial applications, our products range from simple units to highly specialized custom designs. Many of our products principally perform alarm and shutdown functions for our customers, while others provide critical sensor inputs into control systems.

Our reputation for dependable, reliable products is a result of innovative design, superior manufacturing techniques, and a corporate focus on uncompromising quality.

#### **INNOVATIVE DESIGN**

- Proven One Series electronic switch
- Cost-effective solutions that exceed customer requirements
- Fit-for-purpose by application

#### **RAPID DELIVERY**

- Lean manufacturing for maximum productivity
- Operational excellence (OpX) reduces waste
- One-piece-flow for optimum manufacturing efficiency

#### **UNCOMPROMISING QUALITY**

- ISO 9001 certified
- Customer-first approach through service, delivery and value
- US manufacturing

#### **ENVIRONMENTAL STEWARDSHIP**

- Energy management
- Recycling
- Non-toxic manufacturing

#### **GLOBAL PRESENCE**

- Worldwide factory support
- More than 150 distributors
- Third-party approvals and certifications

#### **THREE MANUFACTURING DIVISIONS**

- United Electric Controls
- Applied Sensor Technologies
- Precision Sensors




# CONTENTS

PRODUCTS	DESCRIPTION	PAGE
<b>Solid State</b>		
One Series	Electronic Pressure & Temperature Switches	4
<b>Weather-Tight/General Purpose</b>		
100 Series	General Purpose/Weather-Tight Pressure & Temperature Switches	5
400 Series	Multi-Output Pressure & Temperature Switches	5
<b>Hazardous Location</b>		
120 Series	Hazardous Location Mechanical Pressure & Temperature Switches	6
117 Series	Hazardous Location Division 2 Pressure & Temperature Switches	6
12 Series	Compact, Cylindrical Pressure & Temperature Switches, Stainless Steel	7
TX200 Series	Explosion-Proof HART or ASIC Transmitter, #316 Stainless Steel	7
<b>OEM Switches</b>		
10 Series	Compact, Cost-Effective Cylindrical Pressure Switches for OEMs	8
24 Series	Compact Pressure, Vacuum & Differential Pressure Switches for OEMs	8
54 Series	Economical Pressure, Vacuum & Temperature Switches for OEMs	9
55 Series	Temperature Switches & Thermostats for OEMs	9
<b>Alternative Solutions</b>		
J6 and J21K Series	Weather-Tight Pressure & Differential Pressure Switch with Sensor Isolation	10
J40 Series	Open-Frame/Skeleton Pressure Switch with Metallic Sensor for OEMs	10
800 Series	Temperature Indicators	11
LPS	Low Pressure Switching Monitor with Independent High and Low Limit Alarms	11
Temperature Sensors	Thermocouples, RTDs, Thermistors and Accessories	12-13
<b>Selection Guide</b>	Quick Selection Guide by Product Series	14
<b>Contact Information</b>	Domestic and International Sales Contact Information	15

## ONE SERIES (2W, 4W, 8W) (NON-INCENDIVE; DIV. 2, ZONE 2)

Hazardous location electronic pressure and temperature switches for Zone 2 areas.




### ADVANTAGES:

- FMEDA and SIL capable
- Fully adjustable set point and deadband
- Digital display includes process, status and self-diagnostics
- 2-wire and loop-powered 4-20 mA models available
- Measures gage pressure, differential pressure or temperature
- Ideal for plant upgrades and safety system applications
- Self-diagnostic digital electronics
- 0.1% repeatability with temperature compensation
- Provides the functions of a switch, gauge and transmitter
- Local switching up to 280 VAC at 10 amperes
- Ranges to 6000 psi (410 bar)

## ONE SERIES EX D (2X, 4X, 8X) (EXPLOSION-PROOF DIV. 1, ZONE 1)

Explosion-proof, non-incendive electronic switches for Zone 1 areas.



Visit UE's Product Selector: [www.ueonline.com/productselector](http://www.ueonline.com/productselector)





## 100 SERIES

Single switch, general purpose/weather-tight, pressure, vacuum, differential pressure, and temperature electromechanical switches.



### ADVANTAGES:

- Single switch (SPDT or DPDT) output
- Wide variety of pressure sensors for media compatibility
- Epoxy-coated enclosure, designed to meet enclosure type 4X requirements
- Pump switch models with wide adjustable deadband
- Tamper-resistant set point "lock"
- Optional intrinsic safety compliance per ATEX & GOST standards
- Ranges to 5,000 psi (345 bar), 500 psid (35 bar), 650°F (340°C)



## 400 SERIES

Multi-switch, weather-tight pressure, vacuum, differential pressure, and temperature electromechanical switches



### ADVANTAGES:

- One, two or three switch output may be separated up to 100% of range
- Epoxy-coated enclosure, designed to meet enclosure type 4X requirements
- Choice of reference dial or multi-turn hex screw for set point adjustment
- Wide selection of ranges including low pressure models with narrow deadbands
- Optional intrinsic safety compliance per ATEX & GOST standards
- Ranges to 6,000 psi (410 bar), 200 psid (10 bar), 650°F (340°C)

## 120 SERIES (EXPLOSION-PROOF, DIV. 1)

Rugged explosion-proof pressure, vacuum, differential pressure and temperature electromechanical switches with worldwide agency certifications



### ADVANTAGES:

- Single SPDT or DPDT or dual SPDT outputs
- Choice of internal or external adjustment
- Wide selection of sensor materials and ranges
- Wide adjustable deadband models
- Easy to wire via dual electrical conduit openings and terminal block
- Ranges to 6000 psi (410 bar), 500 psid (35 bar), 650°F (340°C)

## 117 SERIES (ZONE 2, HAZARDOUS LOCATIONS)

Compact pressure, vacuum, differential pressure and temperature electromechanical switches that feature compact, light-weight corrosion-resistant construction



### ADVANTAGES:

- Hazardous location approvals for Class 1, Div. 2, Zone 2
- Hermetically-sealed snap switch, SPDT or DPDT outputs
- Welded stainless steel diaphragm or bellows sensors
- Epoxy-coated type 4X enclosure with captive cover screws
- Terminal block wiring
- Ranges to 3500 psi (240 bar), 500 psid (35 bar), 640°F (335°C)



## 12 SERIES (EXPLOSION-PROOF, DIV. 1, ExD)

Vibration-resistant, 316 stainless steel hazardous location pressure, differential pressure and temperature electromechanical switches, with worldwide agency certifications




### ADVANTAGES:

- Dual seal switch certified to ANSI 12.27.01 standards
- Corrosion-resistant 316 stainless steel construction
- Snap-acting Belleville spring for vibration resistance and set point stability
- Convenient field setting and adjustment
- SPDT or DPDT hermetically sealed switches
- 316 stainless steel wetted parts are NACE MR-0175 compliant
- Ranges to 12,500 psi (860 bar), 150 psid (10 bar), 650°F (340°C)



## TX200 SERIES

Explosion-proof, hermetically sealed, 316 stainless steel HART 7 pressure transmitter  
Explosion-proof and weather tight, 316 stainless steel ASIC pressure transmitter



### ADVANTAGES:

- HART 7 communication protocol superimposed over 2-wire 4-20 mA output
- ASIC 4-20 mA transmitter output or 1-5 or 0-10 VDC transducer output
- 5:1 (ASIC) or 10:1 (HART) pressure range turndown provides multiple ranges while reducing inventory
- Rugged, compact design for control panel or direct process mounting
- Proprietary temperature compensation limits thermal effects on sensor output
- Ranges to 25,000 psi (1724 bar)



## 10 SERIES

Cost-effective, compact, cylindrical pressure switches for OEMs




### ADVANTAGES:

- 1-1/4" diameter and height as small as 3"
- Most models designed to meet enclosure type 4 requirements
- Factory set or field adjustable with tamper-resistant cover
- Choice of 7 electrical terminations
- Variety of options to customize design
- Ranges to 7,500 psi (515 bar)
- Proof pressures up to 12,000 psi (825 bar)

## 24 SERIES

Compact, economical pressure, vacuum and differential pressure switches for OEMs



### ADVANTAGES:

- Compact, lightweight corrosion-resistant polyester enclosure
- Designed to meet enclosure type 4 requirements
- Terminal block wiring
- Available with brass or polysulfone (FDA approved) pressure connections
- OEM capabilities include external adjustment knob with or without reference scale
- Ranges to 90 psi (6 bar), 45 psid (3 bar)





## 54 SERIES

Economical pressure, vacuum and temperature switches for OEMs




### ADVANTAGES:

- Multiple models and options provide OEM design versatility
- Reference scale or multiple-turn hex adjustment versions
- NEMA 1 Lexan enclosure or open frame (skeleton) design
- Choice of one or two SPDT switch outputs
- Ranges to 6000 psi (410 bar), 650°F (340°C)



## 55 SERIES

Rugged temperature switches with external dial



### ADVANTAGES:

- Remote mounting for critical temperature alarm, shutdown and control functions, enclosed or open-frame construction
- Single or dual SPDT switch outputs
- Dual switch output versions can be separated up to 100% of range
- Designed to meet enclosure type 4X requirements
- May be panel or surface mounted
- Heat tracing models
- Ranges to 650°F (340°C)



## J6 & J21K SERIES

Industrial pressure and differential pressure switches with sealed metal bellows sensors



### ADVANTAGES:

- Reliable, sealed and isolated metal bellows sensors
- Welded 316 stainless steel models
- Epoxy-coated enclosure, meeting enclosure 4X requirements
- Single switch (SPDT) output
- J6 ranges to 6000 psi (410 bar)
- J21K ranges to 90 psid (6 bar)

## J40 SERIES

Skeleton (open frame) pressure switches with metal bellows sensors for OEMs



### ADVANTAGES:

- Compact, open frame (skeleton) design for OEM applications
- Brass and phosphor bronze sealed metal bellows sensors
- Easy external adjustment
- Single switch (SPDT) output
- Optional adjustable deadband switch
- Ranges to 300 psi (20 bar)



## 800 SERIES

Indicating temperature switches for industrial heating and cooling applications



### ADVANTAGES:

- Indicating temperature control with remote stainless steel bulb and capillary
- Corrosion-resistant Lexan enclosure
- Single or dual SPDT switch outputs
- Division 1, explosion-proof models for hazardous locations
- Set point repeatability and indication accuracy  $\pm 1\%$
- Ranges to 650°F (340°C)



## LPS & EASY CAL™

Low pressure switching monitor measures differential pressure with independent high and low limit alarms



### ADVANTAGES:

#### LPS

- Available ranges from 0.2" wc to 50" wc (50 Pascal to 20KPa)
- Small 1/16 DIN size for easy panel mounting
- LED display of process and high and low alarms
- 4-20 mA or 0-10 VDC analog output
- Removable terminal block for 18/26 AWG wire
- Compliant with UL 508 and CE EN 61326 EMI requirements

#### EASY CAL™ (Option M11)

- In-place calibration/certification
- Fits standard 4.75" panel opening



# APPLIED SENSOR TECHNOLOGIES

DIVISION OF UNITED ELECTRIC CONTROLS

## TEMPERATURE SENSORS

Applied Sensor Technologies is a major manufacturer of thermocouple, RTD, thermistor and other types of temperature sensor assemblies. ISO 9001 certified and a leading practitioner of Lean Manufacturing methods, AST focuses on building high-quality, high-reliability products for the industrial market. Our expertise covers a wide variety of applications, from lab equipment to road-making equipment, from the blast furnace to the blast chiller, and everything in between.



## SENSOR PRODUCTS FOR OEM CUSTOMERS

AST excels in supplying industrial equipment manufacturers with the right temperature sensor to meet their specific need. We can help you develop, and then manufacture, the most cost-effective sensor for the application.

Our strengths include:

- Convenience – when you need assistance, our sales personnel, located worldwide, are available to help
- Cost-Effectiveness – Lean manufacturing drives us to make your product economically and reliably
- Engineering Expertise – When your engineers want to work on a design, they can talk with our engineers
- Responsiveness – we can work together on JIT, kanban and other dock-to-stock strategies to meet your delivery needs

Applications:

- Scientific Instruments – storage and measurement
- Food Equipment – cooking, storing and cleanup
- Medical Equipment – sterilizing, biological storage
- Aerospace – exhaust gas monitoring
- Energy – turbines, generators and fuel cells





## SENSOR PRODUCTS FOR OUR PROCESS & UTILITY CUSTOMERS

We have a broad selection of standard temperature sensors that are designed for general industrial use. From small fast-response designs for engine testing, to 20' long multipoint assemblies for reactors. If you can sketch it, we can probably build it!

Applications:

- Heat recovery steam generator (HRSG)
- Boiler tubes
- Diesel engine
- Turbine/reactor temperature sensing



## THE SENSOR BOX™

The Sensor Box™ provides the Process customer with an alternative to expediting, emergency orders and large amounts of “dead” inventory. A modular system of sensors, hardware and tools, the Sensor Box™ is used by the maintenance professional to build a variety of temperature sensor assemblies on-site, in minutes. Among the benefits that customers report are:

- Greatly reduced expediting, emergency orders and premium charges
- Improved process up-time
- Lower, more flexible inventory

The Sensor Box™ can be customized in many ways to meet your specific needs.



## ASSEMBLIES FOR HIGH TEMPERATURE APPLICATIONS


In addition to base-metal thermocouples (types J, K, E and T), we also offer platinum thermocouples in types R, S and B for applications such as vacuum furnaces, where the sensed temperature can be over 2500°F. We combine the sensor with a variety of protection tubes (alumina, silicon carbide, hexoloy and many others) in order to provide the maximum reliability and long-life.




## HEAT TRACE RTDs

When you choose our heat trace RTDs, you simplify installation and reduce your maintenance expenses. Designed for use in any pipe or surface temperature measuring application, these sensors have:

- NEMA 4 or explosion-proof heads
- Heat transfer pad with excellent temperature response
- Rugged stainless steel sheaths for excellent mechanical protection
- Replaceable element design for simplified RTD replacement — to replace a faulty element, you simply remove the head cover, disconnect the leads and remove the flexible element. You then insert the new element and reconnect the leads. Your process is up and running in minutes.
- Options include dual RTD sensors, thermocouple sensors and a variety of weld pad and head styles

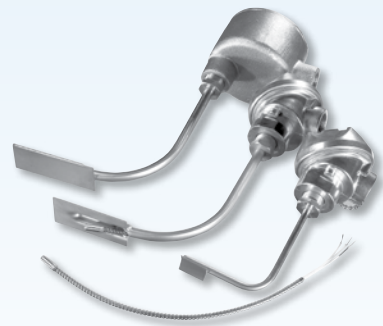

# SELECTION GUIDE

PRODUCT SERIES	J6	10	12	J21K	24	J40	54	55	100	117	120	400	TX200	800	One Series
PAGE	10	8	7	10	8	10	9	9	5	6	6	5	7	11	4
<b>VARIABLE</b>															
Pressure	X	X	X		X	X	X		X	X	X	X	X		X
Vacuum	X				X	X	X		X	X	X	X	C		
Differential Pressure			X	X	X				X	X	X	X			X
Temperature			X				X	X	X	X	X	X		X	X
<b>ENCLOSURE</b>															
Open frame						X	X	X							
Enclosure Type 1 Gen. Purpose		X		X	X		X							X	
Enclosure Type 4 Watertight		X			O									O	
Enclosure Type 4X Watertight	X		X	O				X	X	X	X	X	X		X
Division 1, Hazardous Location			X								X		X	X	X
Division 2, Hazardous Location			X							X	X		X	X	X
Zone 1			X								X		X	X	X
<b>OUTPUT</b>															
Single Switch SPDT	X	X		X	X	X	X	X	X		X	X		X	SPST
Dual Switch SPDT							X	X			X	X		X	(2) SPST
Triple Switch SPDT												X			
DPDT									O		O	O			
Dual Switch DPDT												O			
Adjustable Deadband	O			O		O	O		O		O	O			X
Hermetically-Sealed Switch SPDT			X							X	O				
Hermetically-Sealed Switch DPDT			X							X	O				
4 to 20 mA													O		X
4 to 20 mA, HART® 													O		
1-5 or 0-10 VDC													O		
<b>SENSORS</b>															
Welded st/st Diaphragm			X						X	X	X	X	X		X
Stainless Steel Bellows	X			X					X	X	X	X			
Elastomer Diaphragm		X	X		X		X		X	X	X	X			
Brass/Bronze Bellows	X			X		X	C		X	X	X	X			
Piston	X	X	X				X		X		X	X			
Process Alloy			O						O	O	O		C		
Local Temperature Mount			C				X		X	X	X	X			X
Remote Temp. Mount			X				X	X	X	X	X	X		X	X
<b>MISCELLANEOUS</b>															
Terminal Block					X					X	X	O		O	X
Visual Indication*					O			O	O		O	O		X	X

\* Visual indication may be through a pilot light option or display of process pressure or temperature readings.

Selecting Temperature Sensors see pages 12 and 13 - Applied Sensor Technologies

X = Standard

C = Capability, consult factory

O = Available as option



While United Electric Controls works towards full RoHS compliance with all of our products, most equipment and applications that include UE products are in RoHS exempt Category 9. If you are planning to install UE products in equipment that needs to comply, please contact us immediately so we may assist in your compliance goals.

---

**U.S. SALES OFFICES**

United Electric Controls  
31 Old Stage Road  
Hampton Falls, NH 03844  
Phone: 617-899-1132  
email: [northeastsales@ueonline.com](mailto:northeastsales@ueonline.com)

United Electric Controls  
28 N. Wise Ave.  
Freeport, IL 61032  
Phone: 815-341-2588  
email: [midwestsales@ueonline.com](mailto:midwestsales@ueonline.com)

United Electric Controls  
1022 Vineyard Drive  
Conyers, GA 30013  
Phone: 770-335-9802  
email: [southeastsales@ueonline.com](mailto:southeastsales@ueonline.com)

United Electric Controls  
5829 Grazing Court  
Mason, OH 45040  
Phone: 513-535-5486  
email: [midatlanticsales@ueonline.com](mailto:midatlanticsales@ueonline.com)

United Electric Controls  
102 Salazar Court  
Clayton, CA 94517  
Phone: 925-408-5997  
email: [westcoastsales@ueonline.com](mailto:westcoastsales@ueonline.com)

United Electric Controls  
27 Summit Terrace  
Sparta, NJ 07871  
Phone: 973-271-2550  
email: [easternsales@ueonline.com](mailto:easternsales@ueonline.com)

United Electric Controls  
33018 Weatherby Court  
Fulshear, TX 77441  
Phone: 832-457-6138  
email: [southwestsales@ueonline.com](mailto:southwestsales@ueonline.com)

---

**INTERNATIONAL OFFICES**

CHINA - Shanghai  
United Electric Controls  
Room 1011, 10th Flr,  
Huai Hai Zhonghua Building  
No. 885, Renmin Road, Luwan District  
Shanghai 200010, P.R. China  
Phone: +8621-6255 8059  
email: [chinasales@ueonline.com](mailto:chinasales@ueonline.com)

CHINA - Beijing  
Block B, Room 1102,  
Caizhi International Building, No. 18  
Zhong Guancun East Road  
Haidian District,  
Beijing, 100080 China  
Phone: +86 (-10) -62800956  
email: [beijingsales@ueonline.com](mailto:beijingsales@ueonline.com)

MEXICO  
United Electric Controls  
Zacatecas # 206, Suite 20  
Col Guadalupe CP 89120  
Tampico, Tamaulipas  
Mexico  
Phone: 833-132-3726  
email: [latinamericasales@ueonline.com](mailto:latinamericasales@ueonline.com)

ASIA-PACIFIC  
United Electric Controls, Far East  
No. 1-2-2, 2nd Floor  
Jalan 4/101C  
Batu 5, Jalan Cheras  
56100 Kuala Lumpur, Malaysia  
Phone: 603-9133-4122  
email: [fareastsales@ueonline.com](mailto:fareastsales@ueonline.com)

EUROPE  
United Electric Controls  
05-806 Komorow  
Kujawska 5, Poland  
Phone: +48 22 499 4804  
email: [easterneuropesales@ueonline.com](mailto:easterneuropesales@ueonline.com)

INDIA  
United Electric Controls  
402, Aries Avenue - I,  
58-United Colony  
Sama, Baroda, India - 390008.  
Phone: +91-265-3191711  
email: [indiasales@ueonline.com](mailto:indiasales@ueonline.com)

RUSSIA & SCANDINAVIA  
United Electric Controls, Moscow  
Kuusinena str., 19A, Office 310  
Moscow, 125252, Russia  
Phone: +7 (095) 792-88-06  
email: [russiansales@ueonline.com](mailto:russiansales@ueonline.com)

---

**DIVISIONS**

Precision Sensors  
50 Seemans Lane  
Milford, CT 06460  
Phone: 203-877-2795  
Fax: 203-877-8752  
[www.precisionensors.com](http://www.precisionensors.com)

Applied Sensor Technologies  
180 Dexter Avenue, P.O. Box 9143  
Watertown, MA 02471-9143  
Telephone: 617-923-6966  
Fax: 617-926-8411  
[www.appliedsensortech.com](http://www.appliedsensortech.com)

EASTERN  
68 Mosley Crescent  
Brampton, Ontario  
Canada L6Y 5C8  
Phone: 905-455-5131  
FAX: 905-455-5131

---

**CANADA OFFICES**

---

**RECOMMENDED PRACTICES AND WARNINGS**

United Electric Controls Company recommends careful consideration of the following factors when specifying and installing UE pressure and temperature units. Before installing a unit, the Installation and Maintenance instructions provided with unit must be read and understood.

- To avoid damaging unit, proof pressure and maximum temperature limits stated in literature and on nameplates must never be exceeded, even by surges in the system. Operation of the unit up to maximum pressure or temperature is acceptable on a limited basis (e.g., start-up, testing) but continuous operation must be restricted to the designated adjustable range. Excessive cycling at maximum pressure or temperature limits could reduce sensor life.
- A back-up unit is necessary for applications where damage to a primary unit could endanger life, limb or property. A high or low limit switch is necessary for applications where a dangerous runaway condition could result.
- The adjustable range must be selected so that incorrect, inadvertent or malicious setting at any range point cannot result in an unsafe system condition.
- Install unit where shock, vibration and ambient temperature fluctuations will not damage unit or affect operation. Orient unit so that moisture does not enter the enclosure via the electrical connection. When appropriate, this entry point should be sealed to prevent moisture entry.
- Unit must not be altered or modified after shipment. Consult UE if modification is necessary.
- Monitor operation to observe warning signs of possible damage to unit, such as drift in set point or faulty display. Check unit immediately.
- Preventative maintenance and periodic testing is necessary for critical applications where damage could endanger property or personnel.
- For all applications, a factory set unit should be tested before use.
- Electrical ratings stated in literature and on nameplate must not be exceeded. Overload on a switch can cause damage, even on the first cycle. Wire unit according to local and national electrical codes, using wire size recommended in installation sheet.
- Do not mount unit in ambient temp. exceeding published limits.

**LIMITED WARRANTY**

Seller warrants that the product hereby purchased is, upon delivery, free from defects in material and workmanship and that any such product which is found to be defective in such workmanship or material will be repaired or replaced by Seller (Ex-works, Factory, Watertown, Massachusetts. INCOTERMS); provided, however, that this warranty applies only to equipment found to be so defective within a period of 24 months from the date of manufacture by the Seller (36 months for the Spectra 12, TX200 and One Series products; and 18 months for Temperature Sensors. Seller shall not be obligated under this warranty for alleged defects which examination discloses are due to tampering, misuse, neglect, improper storage, and in any case where products are disassembled by anyone other than authorized Seller's representatives. EXCEPT FOR THE LIMITED WARRANTY OF REPAIR AND REPLACEMENT STATED ABOVE, SELLER DISCLAIMS ALL WARRANTIES WHATSOEVER WITH RESPECT TO THE PRODUCT, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

**LIMITATION OF SELLER'S LIABILITY**

Seller's liability to Buyer for any loss or claim, including liability incurred in connection with (i) breach of any warranty whatsoever, expressed or implied, (ii) a breach of contract, (iii) a negligent act or acts (or negligent failure to act) committed by Seller, or (iv) an act for which strict liability will be inputted to seller, is limited to the "limited warranty" of repair and/or replacement as so stated in our warranty of product. In no event shall the Seller be liable for any special, indirect, consequential or other damages of a like general nature, including, without limitation, loss of profits or production, or loss or expenses of any nature incurred by the buyer or any third party.

UE specifications subject to change without notice.

Visit UE's Product Selector: [www.ueonline.com/productselector](http://www.ueonline.com/productselector)

United Electric Controls has more than 80 years of proven experience providing rugged pressure and temperature electromechanical and electronic switches to Chemical & Petrochemical, Power, Water & Wastewater and Oil & Gas industries, as well as many other challenging OEM applications.

Give us a call at 617-926-1000 to speak to one of our knowledgeable representatives who can help answer any of your application questions. You can also visit [www.ueonline.com](http://www.ueonline.com) to use our product selector, find one of our 150 worldwide distributors, and for further information about United Electric Controls and its products.



UNITED ELECTRIC  
CONTROLS

180 Dexter Ave, P.O. Box 9143  
Watertown, MA 02471-9143  
Phone: 617 926-1000  
Fax: 617 926-2568  
[www.ueonline.com](http://www.ueonline.com)

CP031210K