
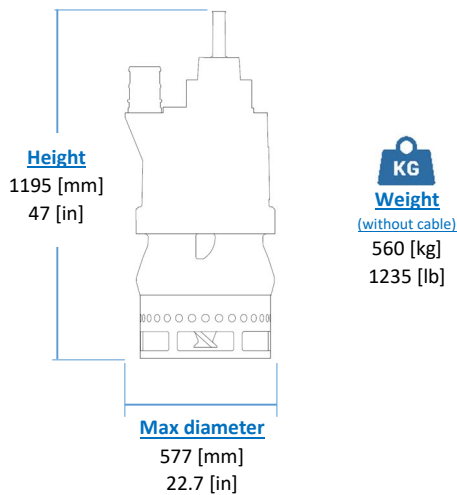
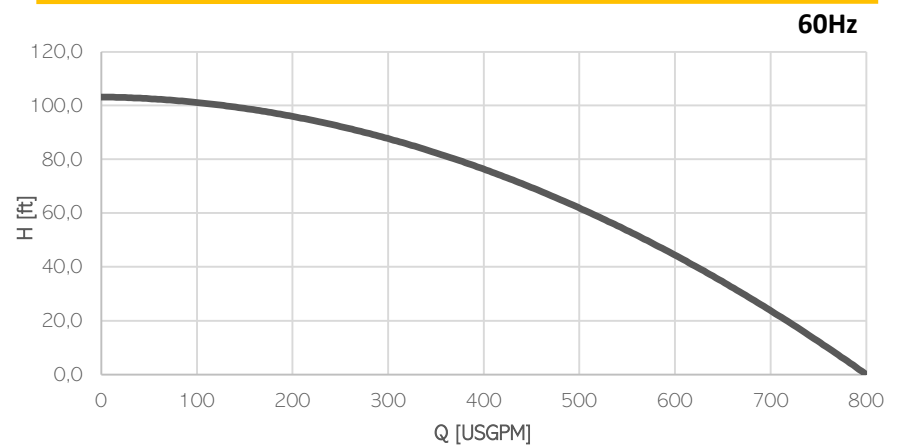


# ELECTRIC PUMP EL20SS

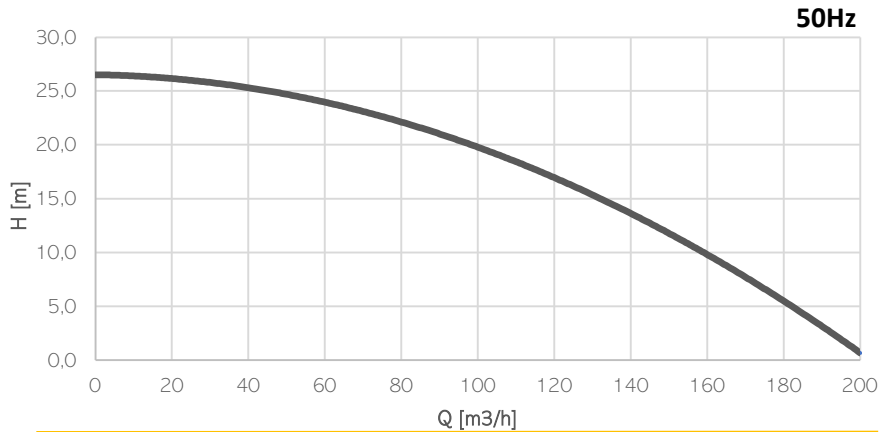

## Electrical motor

Insulation class H

## Cable

1 x H07RN-F 4G10 length 20m

## Operating Conditions

- Max liquid temperature 35°C
- Min Submersion depth 412mm

Model	EL20SS	
Brake Power [kW HP]	22   29	
Electric Power [kW HP]	24   32	
Frequency [Hz]	50	60
Efficiency [%]	45	44
Number of Poles	4	4
RPM	1450	1450
Voltage [V]	400	460
Rated Current [A]	44	38
Solid handling [mm in]	25   1	
Discharge (Hose adaptor) [mm in]	100   4"	

## Materials

Part	Standard
Casing	Cast Iron EN-GJS500
Body	Cast Iron EN-GJS500
Wear Parts	High chrome EN-GJN-HV600 (CH6)
Minimum hardness [HB]	550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10

## Seals and lubricants

Version	STANDARD
Motor Side	MECHANICAL
Impeller Side	MECHANICAL
Oil type	ISO32